RELEASE REV A DATE DFTR ADM DWG NO 136953
REV ZONE REVISION RECORD DATE DFTR-ORIG

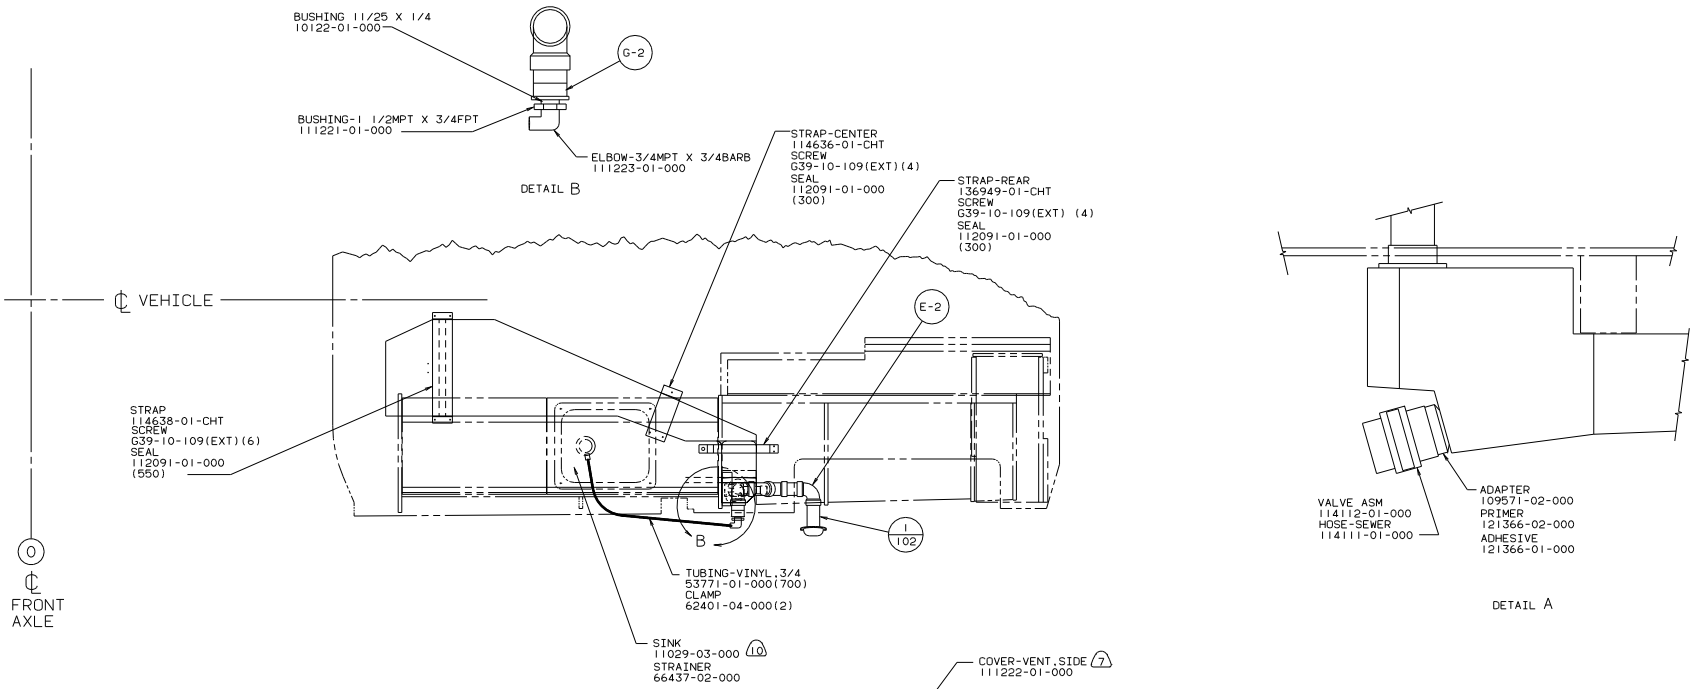

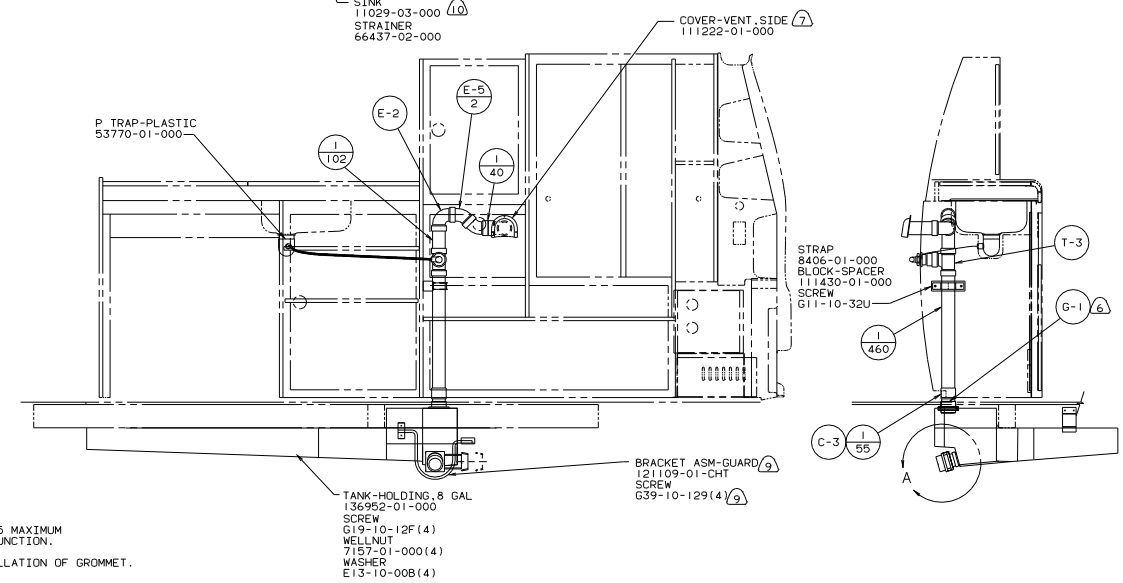

NOTES:

9. USE FOR CANADA EXPORT.
8. ALL EXTERIOR OPENINGS AROUND PIPE TO BE SEALED WITH 69637-01-000.
7. VENT PIPE MUST BE PROJECTED 6 TO 15 MAXIMUM FROM SIDEWALL FOR PROPER FIT AND FUNCTION.
6. SEE DRAWING 61607-01-000 FOR INSTALLATION OF GROMMET.
5. EXPOSED PIPE ON EXTERIOR TO BE PAINTED 37163-01-000.
4. FOR CANADIAN UNITS EACH HOLDING TANK SHALL HAVE A CSA APPROVAL STAMPED NEAR IAPMO APPROVAL.
3. ALL PIPE AND FITTINGS TO BE ASSEMBLED WITH SOLVENT 4020-01-000.
2. SLOPE OF TRAP MUST BE 6 PER 300 MINIMUM.
1. SLOPE OF HORIZONTAL PIPING TO BE 6 PER 300 MINIMUM.

10. FASTENER CLAMPS AND SCREWS SUPPLIED WITH SINK.

X-X FOR DRAINAGE CALLOUTS SEE DWG NO. 116229-01-000

COPYRIGHT 2002 WINNEBAGO INDUSTRIES, INC.

WINNEBAGO 01 117A

DFTR	DATE	UNSPECIFIED TOLERANCES ARE: MATERIAL:
CHKR	DATE	WHOLE DIM (X) ± ?
P E	DATE	ONE-PLACE (X.X) ±
M E	DATE	TWO-PLACE (X.XX) ±
DSNR	DATE	ANGLE ±
		THIRD ANGLE PROJECTION

LAYOUT NO. MVVAN
TITLE: DRAINAGE SYSTEM INSTL
DIA Ø SCALE: 0.250 DO NOT SCALE DRAWING SIZE D DWG NO 136953
ALL DIMENSIONS ARE IN MILLIMETERS SHEET 1 OF 1 REV

REF: 111055

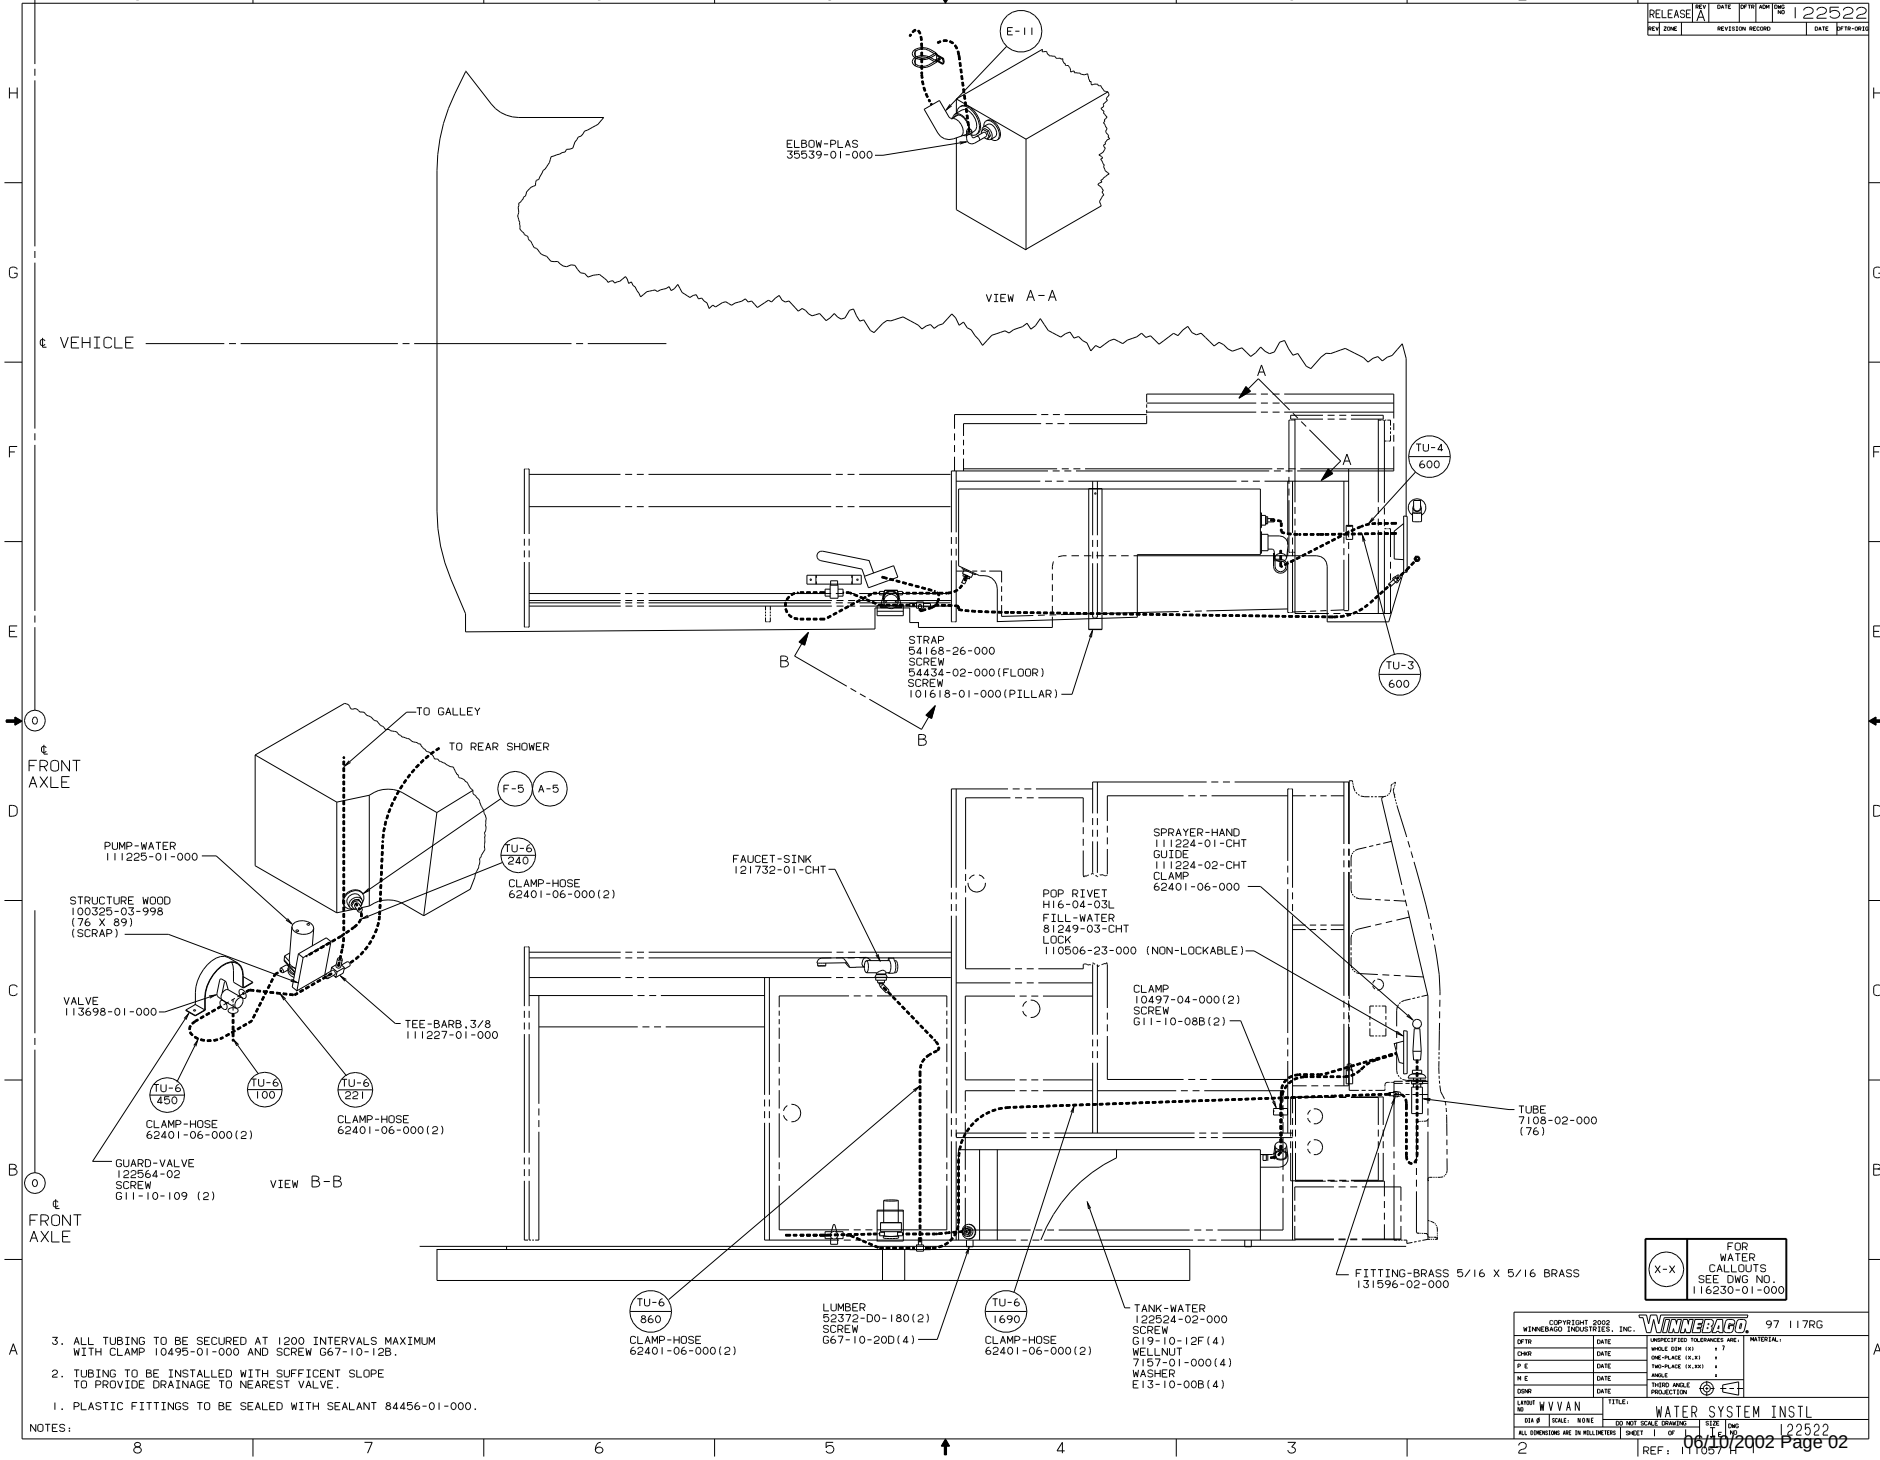
RELEASE A 122522
E-11
ELBOW-PLAS
35539-01-000
VIEW A-A
℄ VEHICLE
A
A
TU-4
600
TU-3
600
STRAP
54168-26-000
SCREW
54434-02-000(FLOOR)
SCREW
101618-01-000(PILLAR)
B
B
TO GALLEY
TO REAR SHOWER
F-5
A-5
℄
FRONT
AXLE
PUMP-WATER
111225-01-000
TU-6
240
CLAMP-HOSE
62401-06-000(2)
STRUCTURE WOOD
100325-03-998
(76 X 89)
(SCRAP)
VALVE
113698-01-000
TEE-BARB,3/8
111227-01-000
TU-6
450
TU-6
100
TU-6
221
CLAMP-HOSE
62401-06-000(2)
CLAMP-HOSE
62401-06-000(2)
GUARD-VALVE
122564-02
SCREW
G11-10-109 (2)
VIEW B-B
℄
FRONT
AXLE
FAUCET-SINK
121732-01-CHT
SPRAYER-HAND
111224-01-CHT
GUIDE
111224-02-CHT
CLAMP
62401-06-000
POP RIVET
H16-04-03L
FILL-WATER
81249-03-CHT
LOCK
110506-23-000 (NON-LOCKABLE)
CLAMP
10497-04-000(2)
SCREW
G11-10-08B(2)
TUBE
7108-02-000
(76)
FITTING-BRASS 5/16 X 5/16 BRASS
131596-02-000
TU-6
860
CLAMP-HOSE
62401-06-000(2)
LUMBER
52372-D0-180(2)
SCREW
G67-10-20D(4)
TU-6
1690
CLAMP-HOSE
62401-06-000(2)
TANK-WATER
122524-02-000
SCREW
G19-10-12F(4)
WELLNUT
7157-01-000(4)
WASHER
E13-10-00B(4)
X-X
FOR
WATER
CALLOUTS
SEE DWG NO.
116230-01-000
3. ALL TUBING TO BE SECURED AT 1200 INTERVALS MAXIMUM WITH CLAMP 10495-01-000 AND SCREW G67-10-12B.
2. TUBING TO BE INSTALLED WITH SUFFICENT SLOPE TO PROVIDE DRAINAGE TO NEAREST VALVE.
1. PLASTIC FITTINGS TO BE SEALED WITH SEALANT 84456-01-000.
NOTES:
COPYRIGHT 2002 WINNEBAGO INDUSTRIES, INC.
WINNEBAGO
97 117RG
MATERIAL:
WVAN
WATER SYSTEM INSTL
122522
REF: 116057 F
06/10/2002 Page 02