





DANGER

Danger of electrical shock, burns or death. Always remove all power sources before attempting any repair, service or diagnostic work. Power can be present from shore power, generator, inverter or battery. All power sources must be disabled and secured before performing any service.



CAUTION

If you lack the skills, tools or equipment to perform diagnostic or repair work leave such work to an authorized Winnebago Industries dealer or other qualified shop.

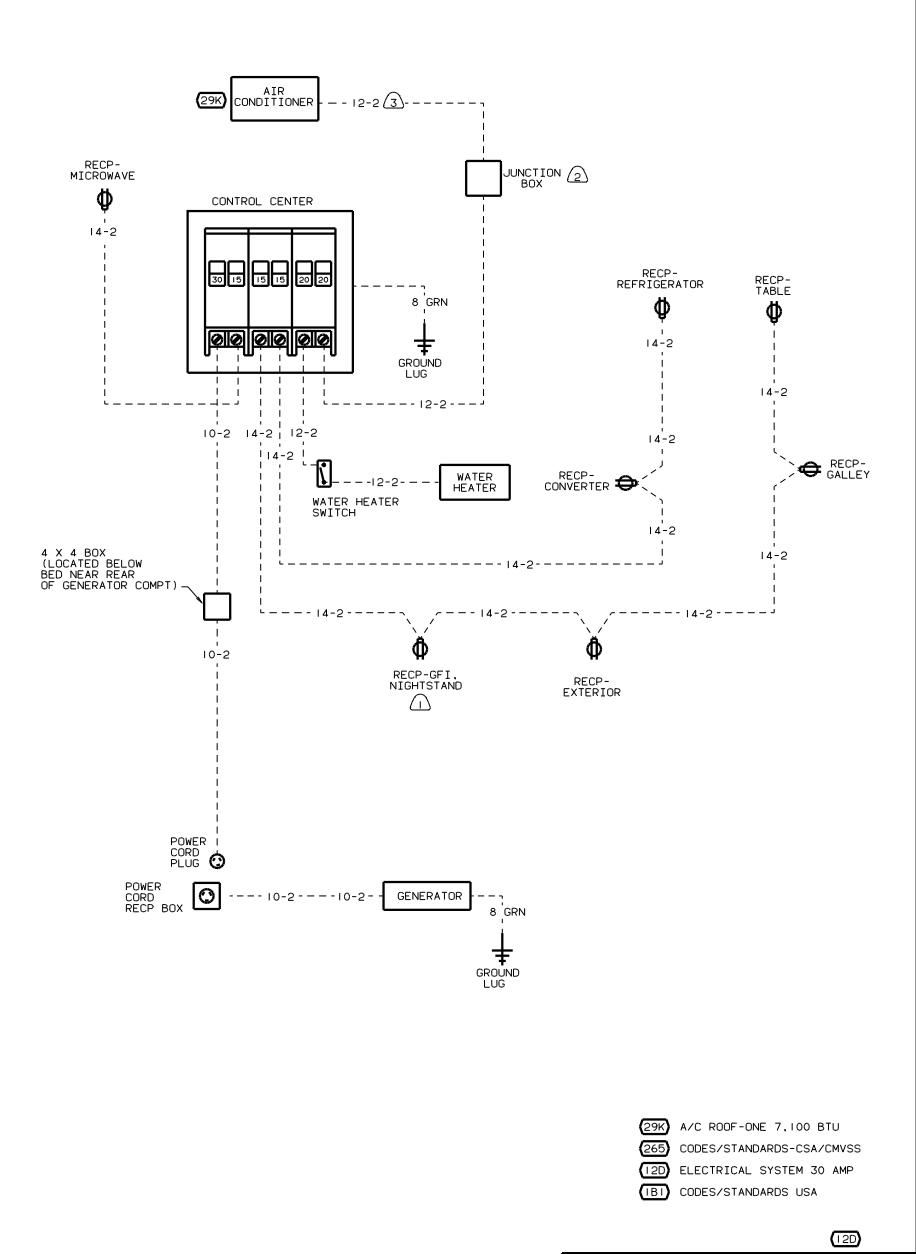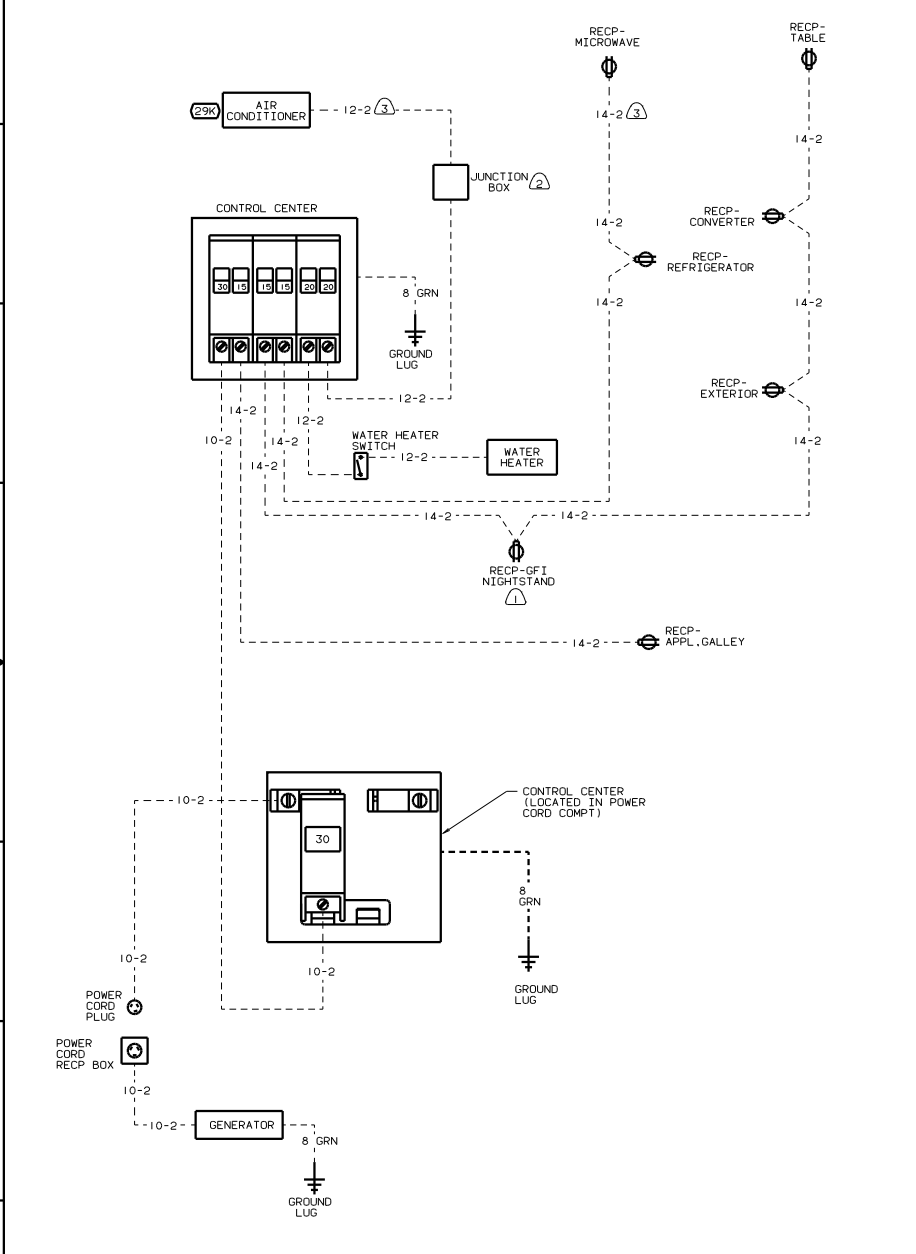

NOTES:
 (3) WIRE ROUTED THRU ROOF.
 (2) NOT USED WITH (29K)
 (1) ALL OUTLETS DOWN STREAM AND INCLUDING THIS OUTLET ARE GROUND FAULT CIRCUIT INTERRUPT PROTECTED.

- (29K) A/C ROOF-ONE 7,100 BTU
- (26D) CODES/STANDARDS-CSA/CMVSS
- (12D) ELECTRICAL SYSTEM 30 AMP
- (1B1) CODES/STANDARDS USA

(12D)

OF IN		DATE	UNSPECIFIED TOLERANCES ARE:	INVERTICAL
CHP	DATE	WHOLE OR 1/16"		
D/E	DATE	ONE-PLACE (1/32)"		
D/E	DATE	TWO-PLACE (1/64)"		
CON	DATE	THREE-PLACE (1/128)"		
DATE	DATE	INDICATE W/ANGLE		
INDICATE W/ANGLE		INDICATE W/ANGLE		
INDICATE W/ANGLE		INDICATE W/ANGLE		
INDICATE W/ANGLE		INDICATE W/ANGLE		

WINNEBAGO 00 222FD

WIRING DIAGRAM-BODY 110V

SHEET 1 OF 1 133867